


FILL-RITE®

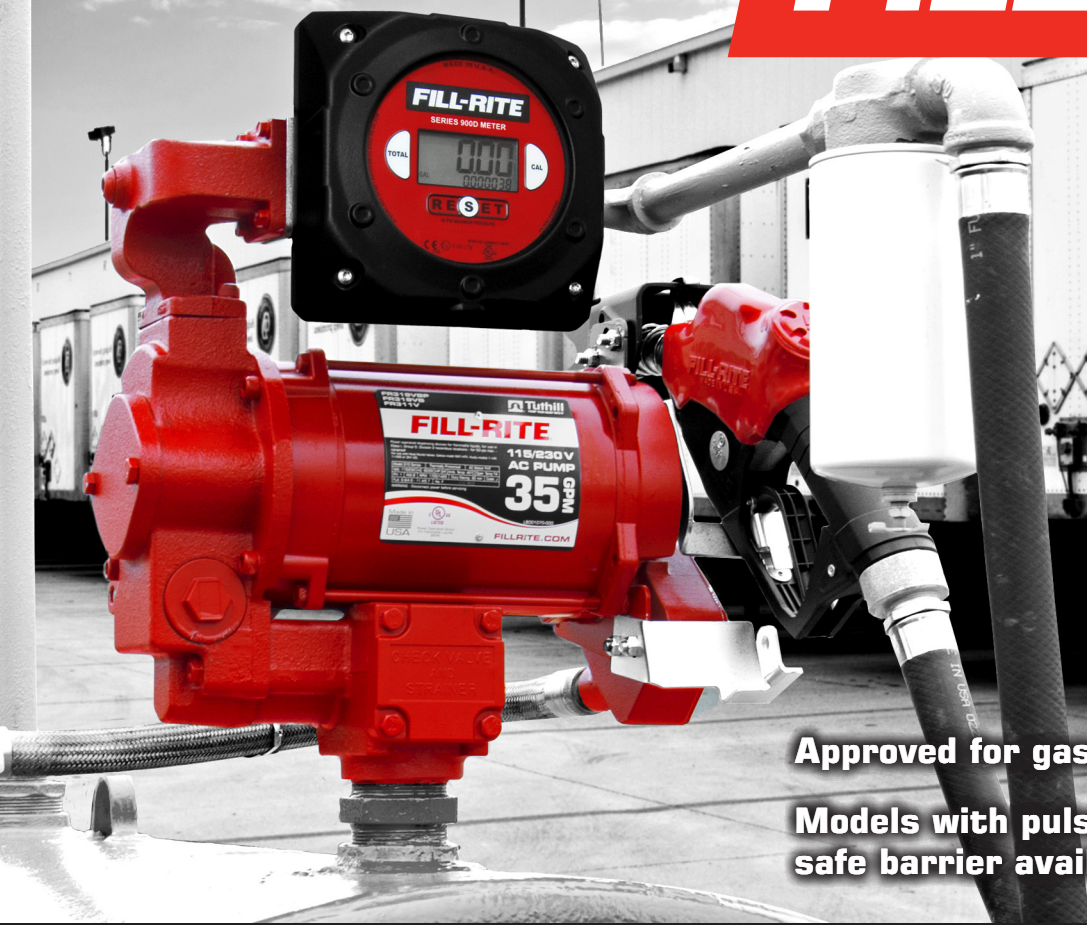

Approved for gasoline and diesel fuels.


Models with pulser and intrinsically safe barrier available.

INDUSTRY-LEADING DIGITAL METERS

THE 900 SERIES FROM FILL-RITE

2 | **YEAR**
WARRANTY

Perfect for Fuel
Management System
applications!
fillrite.com/FMS

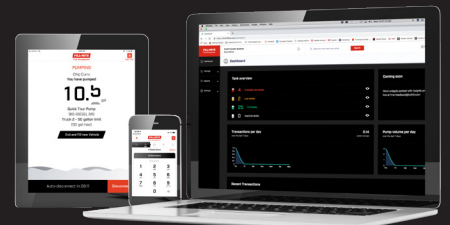

INDUSTRY-LEADING DIGITAL METERS

900 Series digital meters from Fill-Rite® are the cutting edge of meter technology. They boast legendary Fill-Rite quality and all the features you need to make your job easier.



900CD FEATURES

- Approved for gasoline, diesel, kerosene, mineral spirits, Stoddard solvents, and heptanes.
- Flow rate from 6 to 40 gpm (23 to 151 lpm).
- Accuracy: +/-1.25%
- Repeatability: +/-0.25% at calibrated flow rate.
- Maximum pressure: 50 psi.
- Operating temperatures from -15° to 140°F (-26° to 60°C).
- Large 3/4", four-digit LCD counter.
- Electronic head is easily removed and rotates every 90 degrees for ease of viewing regardless of configuration.
- Memory backup for protection against AC and/or battery power failures.
- 1" or 1.5" connections (NPT or BSPT)
- Measures in English, metric, and user-defined units.
- Two-year warranty.
- UL Listed.

900CDP FEATURES

With a pulsar and intrinsically safe barrier included, this meter is approved for gasoline, diesel, kerosene, mineral spirits, Stoddard solvents, and heptanes.

Includes all of the CD features, plus:

- Backlit display for easier viewing in poor lighting.
- AC power with battery backup.
- Operating temperatures with batteries: -15° to 140°F (-26° to 60°C)
- Operating temperatures with external power: -15° to 176°F (-26° to 80°C)
- Wide power input range: 12-40 VDC; .2A and 100-240 VAC, 50-60 Hz*
*VIA barrier. Must be secured in an environmentally safe enclosure.

The 900CDP is the ultimate in convenience. It saves you the time and trouble of sourcing a compatible barrier to provide intrinsically safe operation in explosive or combustible atmosphere installations.



900CD_900CDP